


Verticalie










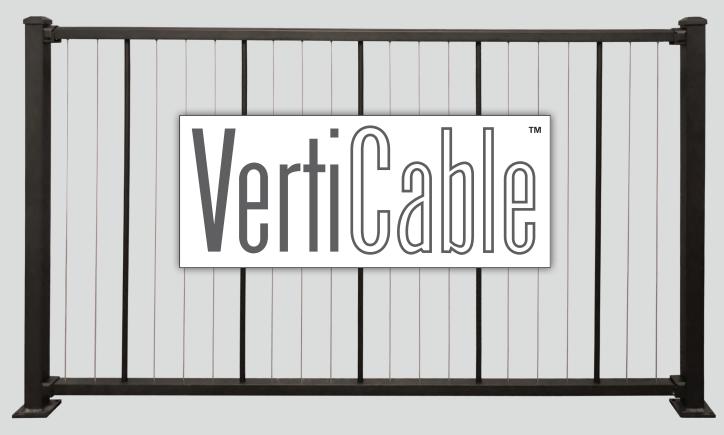

VertiCable[™] Style C80

Contemporary vertical cables and balusters provide architectural style with a virtually unobstructed view. Sections are factory assembled and tensioned, shipped on pallets ready for quick installation. VertiCable™ hardware mirrors Westbury C-Series products providing consistent design, performance and configuration for the contractor or builder. Available in 12 standard AAMA architectural colors, see details at right.

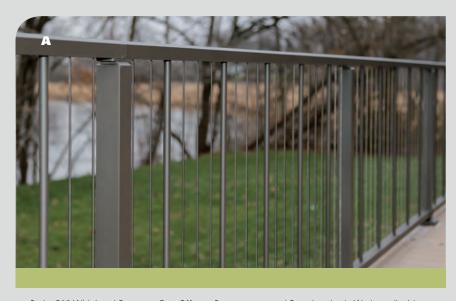

Style: C80 With Level Crossover Post Offers a Contemporary and Seamless Look. Works well with Westbury Drink Rail. Color: Bronze Fine Texture

C80

SPECIFICATIONS

- Section Heights: 36", 42"
- Section Lengths: 4', 5', 6', 8'
- Stair Rail Lengths C101 Only: 4', 5', 6', 7', 8'
- C80 Baluster: 9/16" round x (.156" wall)
- Baluster Spacing: 3.75" c/c
- Stylish Top Rail: 1-3/4" w (.090") x 1-3/8" t (.085")
- Bottom Rail: 1-3/4" w (.090") x 1-1/4" t (.120")
- 1/8" Stainless Steel Cable with Fasteners
- Bottom Rail Support: 8'

NOTE: End spacing may vary by length.

VertiCable[™] Gates



Style: C80 Gates in 36" and 48" widths.



Style: C80 With Level Crossover Post Offers a Contemporary and Seamless Look. Works well with Westbury Drink Rail. Color: Bronze Fine Texture

Exclusive DSI Powder Coating Process

AAMA 2604 & AAMA 2605





Verified AAMA 2604 Compliant Powder Coating

Westbury Aluminum Railing powder coating is an uncompromising quality created by state-of-the-art technology. This is the highest quality powder coating on the market with a lifetime-limited warranty giving you peace of mind in your investment.

Note: 15% Upcharge for Silver with a minimum order.



The raw premium-grade aluminum is inspected to be free of blemishes and is not exposed to the outdoor elements.



The product enters a heated acidic cleaning stage to remove extrusion debris and fabrication oils.



First of three water rinses, ending in pure reverse osmosis water. Finishing with a dried-in-place aluminum sealer.




A 200 MPH air blast removes water drops from the pre-treated aluminum. A convection oven completes the dry-off process.



Powder is applied with 18 automated and 2 manual spray guns. Compressed process air is dried to -35°F Dew Point for superior adhesion.



The powder coating is then bonded and adhered to the aluminum substraight in a 400 degree cure stage.





Satin Black

Black Fine Texture

Ninety Bronze

Bronze Fine Texture

Gloss Beige

Gloss White

White Fine Texture

Clay

Speckled Walnut

Sandy Shore

Chocolate

Silver

VertiCableTM Accessories Featuring Westbury Brackets, Posts, Welded Corner, Caps, and Flairs

The finishing touch to your masterpiece... accessories. A variety of post sizes and wall thickness add strength, standard brackets combined with swivel mounts solving many unique scenarios, an option of post caps for a variety of looks finished off by the convenience of 2-piece and 1-piece post flairs create the Westbury Aluminum Railing accessories.

Brackets





Wall & Angle Swivel Mounts





Stair Mounts





Stair Swivel Mounts





Top and Bottom Double Swivel Stair Mount











www.westburyrailing.com

Posts







Post*†(.125" wall)





Accessories



2", 2-1/2" & 4" Post Flair (2-piece) 6" Post Flair (1-piece) available




Rail Support



Welded Corner







Ball Cap (2", 2-1/2", 4")



MagenaStar Post Cap Light (Low Voltage & Solar)

Crossovers







Corner Crossover Post Stair Crossover Post

Level Crossover Post

*Testing Results - CCRR-0163 complies with IBC[†], IRC[‡], and FBC. Note: Please check with local code authorities for requirements.



